



### Features:

- 240 watt mono commercial mixer amplifier
- Four paging/music zones with zone volume control (global source)
- Individual zone on/off switches
- All-call paging to all zones simultaneously
- Seven inputs with individual volume control
- On-board MP3 player plays music files from USB memory sticks or SD/MMC cards
- Four Mic/Line inputs on XLR/1/4" combo jacks
- Mic/Line input 1 with automatic override
- Individually switchable phantom power on all mic inputs
- AUX input, Line Out + Pre-out/Amp in
- Transformer isolated telephone input with level control
- Dual MOH "Music on hold" outputs 600ohm balanced & 8ohm 1W
- 24V emergency operation
- 4ohm, 25V, 70V and 100V speaker level outputs
- Dual voltage switchable power supply 110V-60Hz/220V-50Hz
- Automatic reset protection circuitry
- Includes 2U rack mounting kit
- Three year conditional warranty
- cTUVus Listed



Includes 2U rack kit





### Specifications:

AC Input Voltage 110-120V/220-240V Switchable  
 DC Input Voltage 24VDC  
 Amplifier Type Class A/B  
 RMS Power @ 4ohms - 240W  
 RMS Power @ 25V - 240W  
 RMS Power @ 70V - 240W  
 RMS Power @ 100 Volts 240W  
 RMS Power @ 24VDC 165W  
 S/N Ratio >80dB  
 Frequency Response (+/-3dB) 80Hz - 18kHz  
 T.H.D.@ Full Power 1.0%  
 Input Sensitivity Mic -52dBV balanced  
 Input Sensitivity Line -10dBV unbalanced  
 Input Sensitivity Aux -6dBV unbalanced  
 Input Sensitivity TEL -10dBV balanced  
 Thermal Protection 75 Degrees Celsius  
 Amplifier protection Overload, Thermal & Short Circuit  
 Output Connectors – Terminal Block screw type, RCA

### Dimensions:

W -16.53" - 420mm  
 H - 3.5" - 89mm (2U)  
 D – 10.2" - 260mm


### Shipping Weight:

24.2lb/11kg

### Warranty Conditional:

3 years

### Optional Accessories:

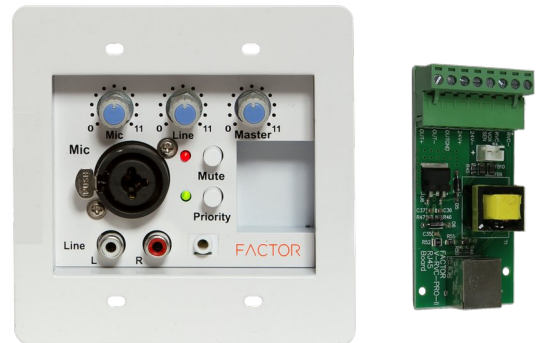

Add The **V-RVC-PRO** and **V-RVC-RJ45** for remote Mic/Line/Blue Tooth inputs up to 2000' from the amplifier over Cat-6



Add The **Factor-BT** Blue Tooth 5.0 module to the V-RVC-PRO for Blue Tooth music streaming and wireless volume up to 2000' from the amplifier over Cat-6